


CROSS ARM STRAPS

The Cross Arm Strap is one of the most cost effective and versatile anchor options available on the market today. The anchorage point can be looped over a steel support beam, structural wood member, or any structure deemed suitable by a competent person. Once the small D-Ring is pulled through the pass-thru loop (the larger D-Ring), you have an anchor point that is both ANSI and OSHA compliant. The heavy duty wear pad protects the structural webbing against abrasion helping to increase service life, and the Malta Dynamics signature colors make it easy to locate even from ground level. The Cross Arm Strap is compatible for use with all ANSI rated lanyards and SRLs.

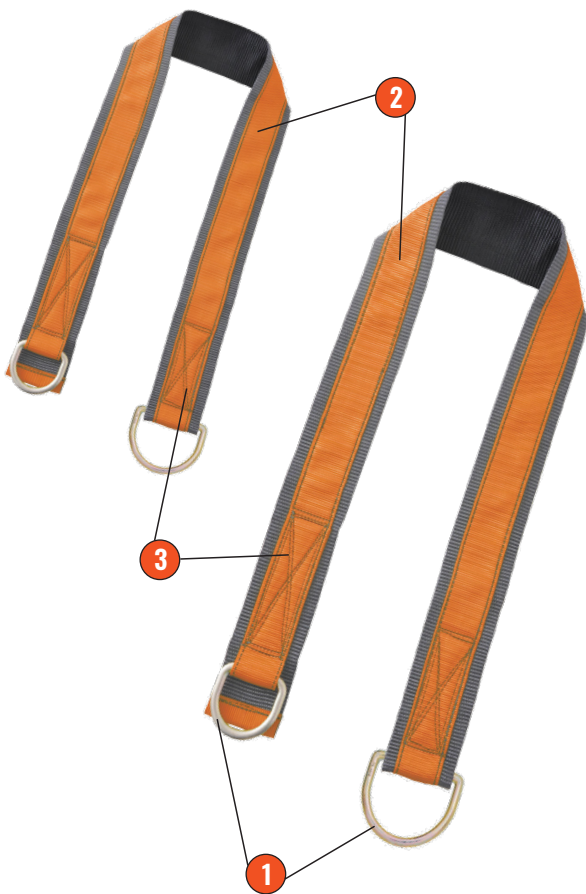

1. Standard Size D-Ring and Large D-Ring for Easy Pass-thru and Installation
2. Malta Dynamics' Signature Orange Color Increases Visibility
3. Increased Durability with Dual Reinforced Webbing and Heavy Duty Stitching

- Equipped with a Heavy Duty Wear Pad to Help Protect the Structural Webbing Against Abrasions and Snags

PERFORMANCE SPECIFICATIONS

Worker Capacity Range	130-310 lbs. Max
Static Tensile Strength	5,000 lbs

MATERIALS SPECIFICATIONS

Webbing	Polyester
D-Ring	Alloy Steel

FALL PROTECTION STANDARDS

OSHA	1910, 1926 Subpart M
ANSI	Z359.1-2007, A10.32-12

PART #	SIZE	WEIGHT
A6350	4"	1.2 lbs.
A6351	6"	1.5 lbs.