


PRODUCT SPECIFICATIONS

CLASS 1-P PYGMY HOG SERIES

The Pygmy Hog® 6' Self-Retracting Lifeline is a Class 1-P Web SRL that is manufactured from non-corrosive, lightweight components including a durable ultrahigh-molecular-weight Polyethylene (UHMWPE) & Polyester lifeline, and a durable housing made from a high strength thermoplastic polymer. The Pygmy Hog® Self-Retracting Lifeline features a standard rebar or steel snap hook connector and supports an ANSI worker weight capacity range of 130-310 lbs. The Pygmy Hog® is built to work as a single unit or in a kit of two with the user wearing both units at once. This OSHA and ANSI compliant, high-quality equipment is a must-have for your jobsite.

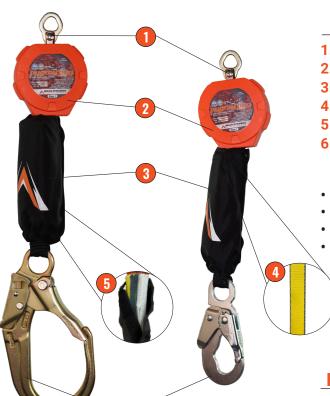

KEY FEATURES

- 1. 360° Swivel Top Connector
- 2. Lightweight and Durable Housing
- 3. Shock Pack Cover
- 4. Polvester Lifeline
- 5. External Shock Pack
- 6. Steel Snap Hook or Rebar Hook
- Carabiner Included
- For overhead use only
- Fits in the Palm of Your Hand
- Side Lifeline Exit

PERFORMANCE SPECIFICATIONS

MATERIALS SPECIFICATIONS	20
Maximum Arresting Distance	28"
Maximum Arresting Force	1,600 lbf
Average Arresting Force	1,100 lbf
Worker Capacity Range	130-310 lbs.

MAIERIALS SPECIFICATIONS

Cable	Polyester Lifeline
Snap Hook	Alloy Steel
Housing	High-Impact Resistant Polymer

FALL PROTECTION STANDARDS

ANSI	ANSI 2559.14-2021 Glass 1-P	
OSHA	1926 Subpart M, OSHA 1910, 1926.502, 1910.66	

PART #	SIZE	WEIGHT
C7102-G2	6' Snap	2.4 lbs.
C7102D-G2	6' Dual Snap	5.4 lbs.
C7104-G2	6' Rebar	3.3 lbs.
C7104D-G2	6' Dual Rebar	7.2 lbs.