
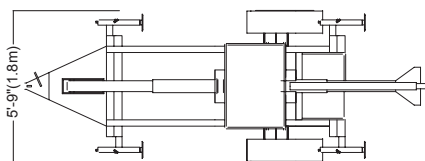
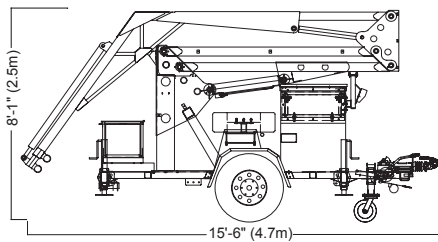


XSERIES

MOBILE FALL PROTECTION

SPEC SHEET

X1250

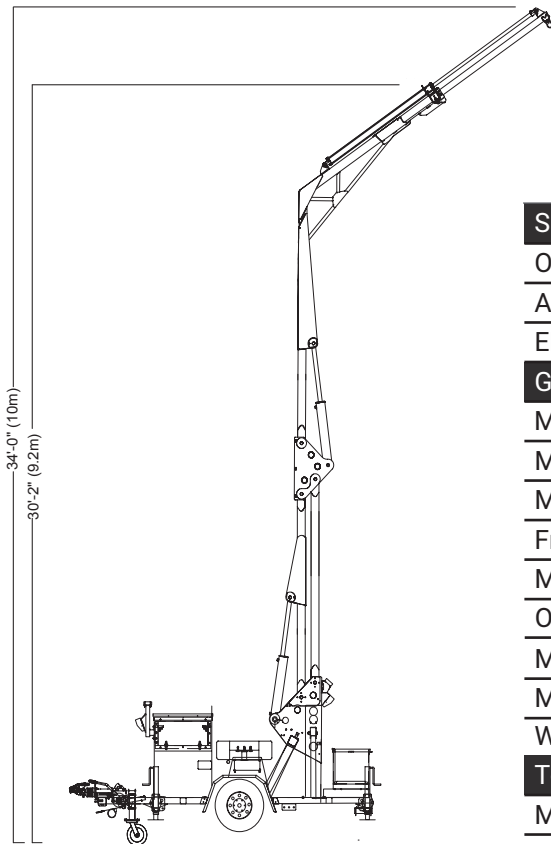

Safety Standards

OSHA Fall Arrest Standards

Applicable Fall Arrest Standards set forth in ANSI Z359.6

EN 795

General

Max. Working Height 34' (10 m) with Mast Fully Extended

Min. Working Height 2' (.6m)

Max. Folded Height 8'-1" (2.6m)

Frame Width 5'-9" (1.7m)

Max. Arm Reach Out 9'-9.5" (3m)

Overall Length 15'-6" (4.7m)

Max. Anchor Point capacity 310 lbs

Max. Allowable Users 3

Weight 5,900 lbs (2676 kg)

Towing

Max. Towing Speed Posted Highway Speed

Axle 7000 lbs. Torsion Axle w/Electric Brakes

Tires 225/70/R15 Radials

Receiver 2-5/16" Ball

Trailer Plug Wiring 7-Pole Blade Style lead

Operation

Actuating Method Electric Powered Hydraulic system

Controls Remote (15 ft. cord length)

Power Source 12 volt Battery (210 Amp hour rating) w/30A Fuse & Battery Gauge

Charging System 110 Volt quick Smart Charger with Cord

Outrigger System Four (4) Manually Adjustable Jacks

Hydraulics

Fluid Type Mobil DT10 Excel 22

Fluid Capacity 12.5 Gallons

*SRLs not included.